

CHECKWEIGHER



INT810 Series

Checkweigher for Heavy weight



Easy operation

10.4" wide color touch screen.



High speed & High accuracy


High speed, high accuracy weighing, by continuous weighing method.



Data management

Easy data back-up with USB.

Layout

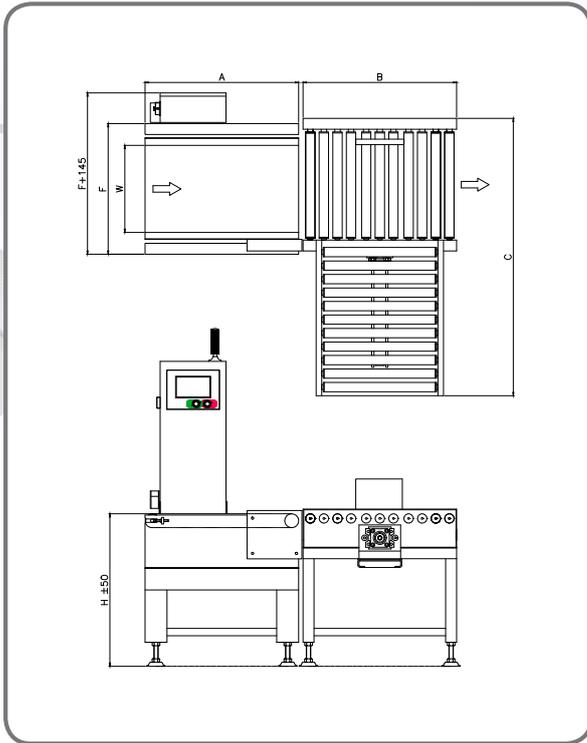

Screen



Application



Specification

| Model | | INT810-SWH1840 | INT810-SWH3050 | INT810-SWH6060 |
|--------------------------------------------------------------------------------------------|--------------------|---------------------------------------------------|----------------|----------------|
| Maximum capacity | | 18kg | 30kg | 60kg |
| Weighing Range | | 10g~18kg | 10g~30kg | 20g~60kg |
| Scale Interval | | 5g | 10g | 20g |
| Maximum Accuracy* | | ± 10g | ± 10g | ± 20g |
| Maximum Weighing Speed** | | 50ea/min | 40ea/min | 30ea/min |
| Product Size | Width | 50~400mm | 50~500mm | 50~600mm |
| | Length | 100~650mm | 100~800mm | 100~1,000mm |
| | Height | 50~400mm | 50~500mm | 50~600mm |
| Conveyor Size | Infeeding Conveyor | - | - | - |
| | Weighing Conveyor | 700mm | 900mm | 1100mm |
| | Rejector Conveyor | 700mm | 920mm | 1120mm |
| Application Rejectors | | Pusher Roller | Pusher Roller | Pusher Roller |
| Power Requirements | | 220VAC ± 10%, Single Phase, 50/60Hz | | |
| Environmental Conditions | | 5°C~35°C (41°F~95°F), Relative Humidity : 35%~85% | | |
| *Maximum Accuracy may change depending on the product conditions. | | | | |
| **Maximum Weighing Speed may change depending on the product dimension and conveyor speed. | | | | |

※ Please contact AutoMS for details.

