


STARWHEEL CHECKWEIGHER



INT710 Series

Ampoule Type

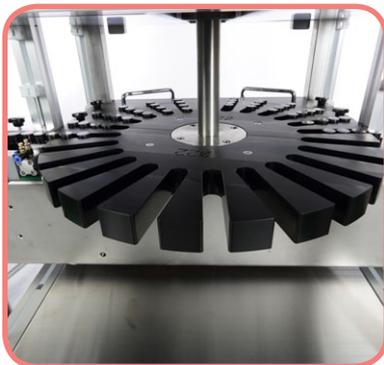

Space efficiency

Increase space efficiency in narrow production lines by installing star wheel on existing production line.



Accurate weighing


Product that have been improved to enable precise weighing of small bottles to weigh by the starwheel.



Fast weighing

Maximum weighing speed is 300ea/min.

Layout

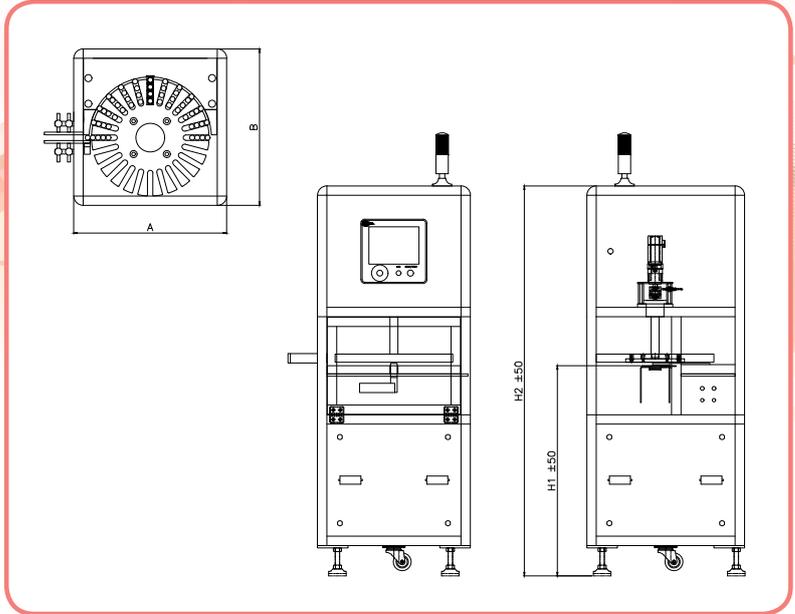

Screen



Specification

Starwheel Checkweigher	INT79X-STA3	
	Load cell	High Accuracy
Maximum capacity	300g	300g
Weighing Range	1g~300g	1g~300g
Scale Interval	0.05g	0.001g
*Maximum Accuracy	±0.1g	±0.02g
**Maximum weighing speed	50ea/min * each lane	50ea/min * each lane
Product size	Width	Ø10~Ø85
	Length	
	Height	180mm
Applicable Rejector	Air pusher	Air pusher
Power Requirements	220VAC ±10%, Single Phase, 50/60Hz	
Environmental Conditions	5°C~35°C (41°F~95°F), Relative Humidity : 35%~85%	
*Maximum Accuracy may change depending on the product conditions.		
**Maximum Weighing Speed may change depending on the product dimension and conveyor speed.		

※ Please contact AutoMS for details.

