


Gross and net weight check Type



Possible weighing of net weight

Possible individual weighing of gross weight and net weight.

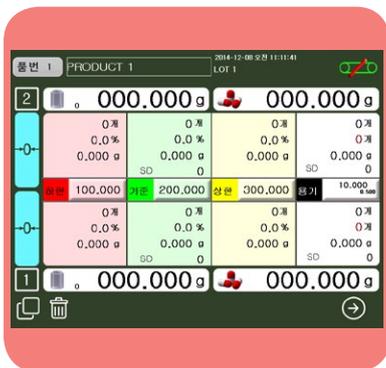

Easy high-speed weighing

Easy high speed weighing of a small products.



Higher space efficiency

Easy to apply to existing lines. (Unnecessary conveyor cutting)

Application




1Lane





2Lane

Screen


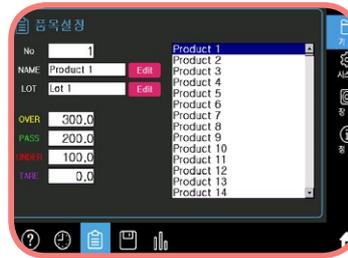


Layout

1Lane

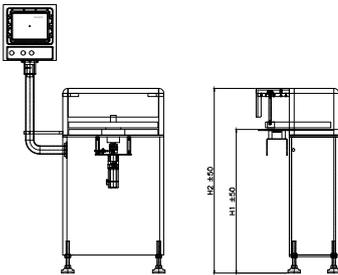

2Lane

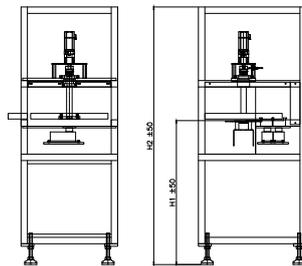

Specification

Model	Standard	High Accuracy	
	Lane	1 lane	2 lane
Maximum Capacity		300g	
Weighing Range		1g ~ 300g	
Scale Interval		0.001g	
Maximum Accuracy		±0.02g	
Maximum Weighing Speed*		50ea/min	100ea/min
WEIGHING TYPE		STANDARD	
Product size	Width	20 ~ 90 mm	
	Length	20 ~ 90 mm	
	Height	20 ~ 150 mm	
Applicable Rejectors	Flip Bar	FB2-10	
	Pusher on Belt	PB2-10	
Power Requirements	220VAC ± 10%, Single Phase, 50/60Hz		
Environmental Conditions	5°C~35°C (41°F~95°F) Relative Humidity : 35%~85%		
*Maximum Accuracy may change depending on the product conditions.			
**Maximum Weighing Speed may change depending on the product dimension and conveyor speed.			

※ Please contact AutoMS for details.

