


STICK PACK CHECKWEIGHER

Aligned Type



Dual System

Combined Aligner and Check Weigher for space saving

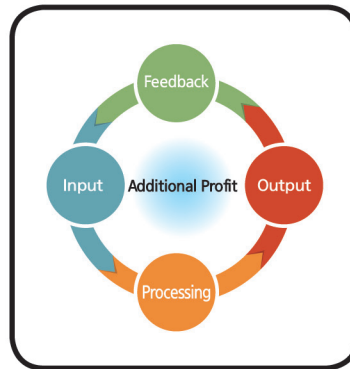

Feedback System



Feedback system that sends individual weight data to packaging machine to automatically adjust the filling quantity.







Dual Sorting System

Equipped Dual sorting system for perfect sorting system

Layout

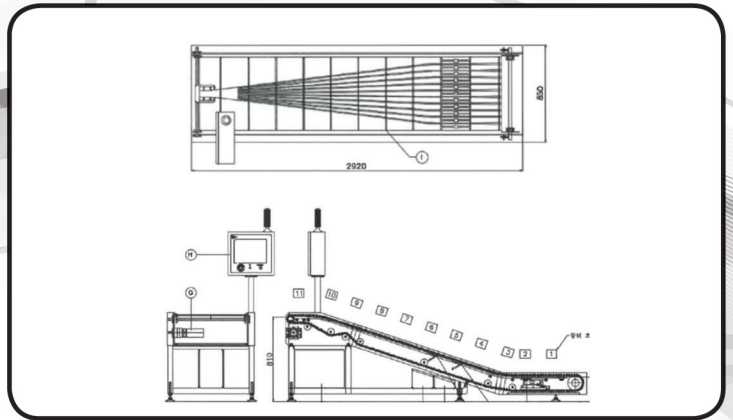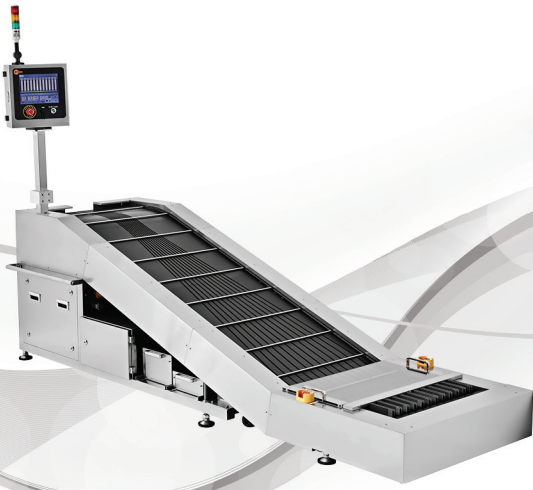

Screen

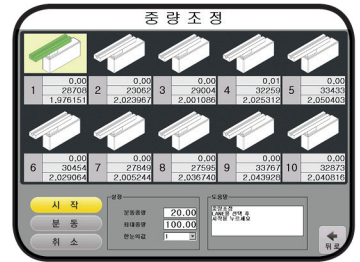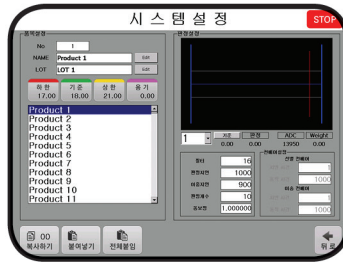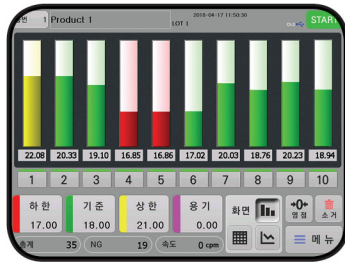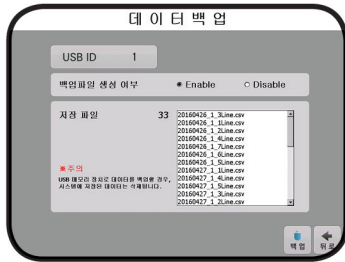

Specification

Stick pack Checkweigher		INT69X-ALL1	
		Load cell	High Accuracy
Maximum capacity		100g	100g
Weighing Range		0.1g~100g	0.1g~100g
Scale Interval		0.01g	0.001g
*Maximum Accuracy		±0.05	±0.008g
**Maximum weighing speed		70ea/min*each lane	50ea/min*each lane
Product size	Width	18 mm ~ 30 mm	18 mm ~ 30 mm
	Length	50 mm ~ 200 mm	50 mm ~ 200 mm
	Height	2 mm ~30 mm	2 mm ~30 mm
Applicable Rejector		Dual drop gate	Dual drop gate
Power Requirements		220VAC ±10%, Single Phase, 50/60Hz	
Environmental Conditions		5℃~35℃ (41℉~95℉), Relative Humidity : 35%~85%	
*Maximum Accuracy may change depending on the product conditions.			
**Maximum Weighing Speed may change depending on the product dimension and conveyor speed.			

※ Please contact INTECHTRADING for details.



INTECHKOREA CO., Ltd.
 INTECHTRADING Co., Ltd.
 10. janggogae-RO 217BEON-GIL, Seo-gu, In-
 checon, Republic of Korea
 Tel : +82-32-681-0720 / Fax : +82-32-681-0713
 E-mail : Intech@intechkorea.com
 http://www.intechkorea.com